



ALIZE

CANOPY REMOVAL / REFITTING


Please see the below instructions for removing and fitting the canopy on an Alize gazebo.

If you have any problems, or questions during the change over, please feel free to contact us for advice using the email address at the bottom of the page.

Before starting to remove the canopy, make sure the gazebo is in a secure position and you have a step ladder or sturdy chair to stand on to avoid risking damage to the frame or yourself.

Firstly, remove the 8, rib end screws using a phillips screw driver. Make sure to keep the screws in a safe place as you will need them to put the canopy back on.

Once the canopy is loose, fold it into the centre so you can access the finial on the top. Use a step ladder or sturdy chair to reach the finial. Take care when removing the finial and seek assistance if needed.

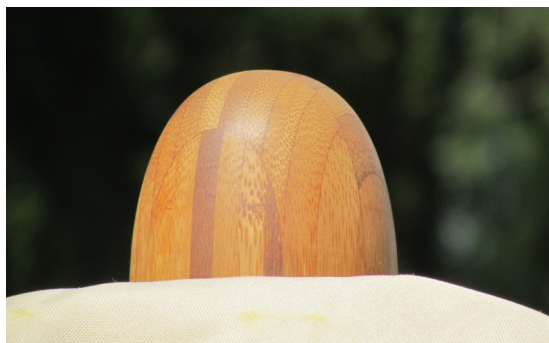

Once the finial and rib screws have been removed the canopy can be taken off the frame and stored. Take care not to let the canopy touch the floor to keep it clean.

To refit the canopy, simply reverse the procedure.